

# IC-GM1600E



## GMDSS Portable for Survival Craft

- **Meets the strict environmental requirements for survival craft radio**

The IC-GM1600E meets temperature, thermal shock, vibration and drop resistant (from 1 m height) requirements. After passing those environmental tests, the IC-GM1600E retains 1m depth waterproof construction as specified by IMO resolutions A.694 (17), MSC149 (77) and related specifications.

- **Optional high capacity Lithium battery, BP-234, has superior low temperature characteristics**

Provides more than 8 hours operating time even at  $-20^{\circ}\text{C}$ .  
(Duty cycle: Tx: Rx: Stand-by = 6: 6: 48)

- **Large keypad with positive button action**

- **Wide viewing angle LCD display**

- **Meets MED 2014/90/EU, "Wheel mark" requirements**



- **Other features**

- One touch access to Channel 16 and call channel
- Highly visible yellow colored body
- Bright LED indicator on the top of panel



## SPECIFICATIONS

### GENERAL

- Frequency range Tx/Rx : 156.300–156.875MHz
- Mode : FM (16K0G3E)
- Power supply requirement : 7.2V DC nominal
- Current drain (approx. at 7.2V DC) :
  - Tx 2W output 1.0A
  - 1W output 0.7A
  - Rx AF max. 200mA
- Operating Temp. range : -20°C to +55°C
- Antenna impedance : 50Ω (SMA fixed-type)
- Dimensions (W×H×D) : 65×145×44 mm (projections not included)
- Weight (approx.) : 385g (with BP-234)

### TRANSMITTER

- Output power : 2W/1W (Hi/Low)
- Max. frequency deviation : ± 5.0kHz
- Frequency error : ± 1.5kHz
- Spurious emissions : 0.25μW (30MHz–1GHz)  
1.00μW (1GHz–2GHz)
- Adjacent channel power : 70dB
- FM Hum and noise ratio : 40dB
- Audio harmonic distortion : Less than 10% (at 60% deviation)

### RECEIVER


- Sensitivity (20dB SINAD) : -2dBμ typ. (emf)
- Squelch sensitivity : ±0dBμ typ. (emf) (at threshold)
- Adjacent channel selectivity : 70dB
- Spurious response : 70dB
- Intermodulation rejection : 68dB
- Hum and noise ratio : 40dB
- Audio output power : 0.2W (at 10% distortion with an 8Ω load)

### Supplied accessories: (\* Depending on version)

- Battery pack, BP-252\*      • Battery charger, BC-173\*
- AC adapter, BC-147\*      • Belt clip, MB-103Y
- Antenna, FA-S61V (fixed)   • Neck strap

Measurement made in accordance with IEC61097-12.  
All stated specifications are subject to change without notice or obligation.  
To comply with the requirements of GMDSS survival craft radio, the primary battery pack, BP-234, is required.

### DIMENSIONS

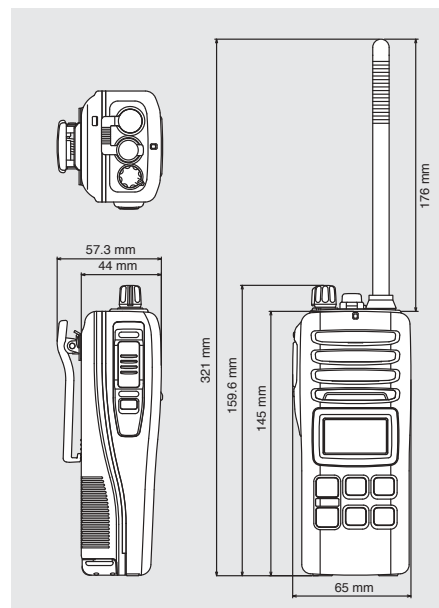

## OPTIONS

### LITHIUM BATTERY PACK



BP-234

<For survival craft>  
**BP-234** Lithium battery pack  
9.0V/3300mAh primary battery pack for GMDSS survival craft radio.

### Li-Ion BATTERY PACK



BP-252

<For on-board use>  
**BP-252** Rechargeable Li-ion battery  
7.4V/940mAh (min), 980mAh (typ.).  
Same as supplied with some versions.

### REGULAR CHARGER



BC-147

BC-173

<For on-board use>  
**BC-173** DESKTOP CHARGER  
+ **BC-147**\*<sup>1</sup> AC ADAPTER  
Regularly charges the battery pack, BP-252 in 10 hours (approx.).

\*<sup>1</sup> BC-147SE for 230V AC. SA for 120V AC. SV for 240V AC.

### BELT CLIP



MB-103Y

**MB-103Y** BELT CLIP  
Alligator type belt clip. Same as supplied.

Read all instructions enclosed with the transceiver carefully and completely before using the transceiver.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries.

**Icom Inc.**

1-1-32, Kamimimami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

[www.icom.co.jp/world](http://www.icom.co.jp/world)

**Count on us!**

### Icom America Inc.

12421 Willows Road NE,  
Kirkland, WA 98034, U.S.A.  
Phone: +1 (425) 454-8155  
Fax: +1 (425) 454-1509  
E-mail: [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL: <http://www.icomamerica.com>

### Icom (Europe) GmbH

Communication Equipment  
Auf der Krautweide 24  
65812 Bad Soden am Taunus, Germany  
Phone: +49 (6196) 76685-0  
Fax: +49 (6196) 76685-50  
E-mail: [info@icom-europe.com](mailto:info@icom-europe.com)  
URL: <http://www.icomeurope.com>

### Icom France s.a.s.

Zac de la Plaine,  
1 Rue Brindejonc des Moulinais, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone: +33 (5) 61 36 03 03  
Fax: +33 (5) 61 36 03 00  
E-mail: [icom@icom-france.com](mailto:icom@icom-france.com)  
URL: <http://www.icom-france.com>

### Icom Canada

Glenwood Centre #150-6165  
Highway 17A, Delta, B.C.,  
V4K 5B8, Canada  
Phone: +1 (604) 952-4266  
Fax: +1 (604) 952-0090  
E-mail: [info@icomcanada.com](mailto:info@icomcanada.com)  
URL: <http://www.icomcanada.com>

### Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone: +34 (93) 590 26 70  
Fax: +34 (93) 589 04 46  
E-mail: [icom@icomspain.com](mailto:icom@icomspain.com)  
URL: <http://www.icomspain.com>

### Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone: +61 (03) 9549 7500  
Fax: +61 (03) 9549 7505  
E-mail: [sales@icom.net.au](mailto:sales@icom.net.au)  
URL: <http://www.icom.net.au>

### Icom Brazil

Rua Ibororó, 444 Padre Eustáquio  
Belo Horizonte MG,  
CEP: 30720-450, Brazil  
Phone: +55 (31) 3582 8847  
Fax: +55 (31) 3582 8987  
E-mail: [sales@icombrasil.com](mailto:sales@icombrasil.com)

### Icom (UK) Ltd.

Blacksole House, Altira Park,  
Herne Bay, Kent, CT6 6GZ, U.K.  
Phone: +44 (0) 1227 741741  
Fax: +44 (0) 1227 741742  
E-mail: [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL: <http://www.icomuk.co.uk>

### Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone: +886 (02) 2559 1899  
Fax: +886 (02) 2559 1874  
E-mail: [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL: <http://www.asia-icom.com>

Your local distributor/dealer: